

## PVC COATED CONDUIT BODIES - C FORM 8



### Description:


Calbond offers the full line of Form 8 PVC coated conduit bodies. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.

### Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Fittings are supplied with plastic encapsulated stainless steel screws
- Sizes available are 1/2" to 4"\*
- \*3 1/2" and 4" in PVC Coated Aluminum Mark 9 only

### Standards:

- UL Listed Standard 514B
- CSA Standard: C22.2 No. 18
- Verified NEMA 4X Rated

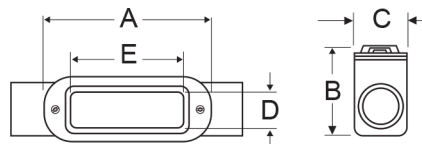

Item Number	Trade Size	Metric Size (mm)	A	B	C	D	E	Weight Per 100 (lbs)
PV0500C18	1/2"	16	6.69	1.48	1.46	1.00	3.31	200
PV0700C28	3/4"	21	7.78	1.73	1.27	1.19	3.94	230
PV1000C38	1"	27	9.31	1.98	1.83	1.38	4.56	280
PV1200C448	1-1/4"	35	11.00	2.42	2.27	1.75	5.31	450
PV1500C58	1-1/2"	41	13.38	2.82	2.83	2.13	6.50	650
PV2000C68	2"	53	14.25	3.60	3.83	3.00	8.56	1030
PV2500C78	2-1/2"	63	17.63	4.48	5.08	14.25	10.88	1800
PV3000C88	3"	78	17.63	4.85	5.08	4.25	10.88	2050
PA3500C989	3-1/2"	91	20.75	5.73	6.33	5.44	13.44	1000
PA4000C1089	4"	103	20.75	5.73	6.33	5.44	13.44	1200