

# PVC COATED ALUMINUM 90° ELBOWS

## Features:


- Exterior PVC coating thickness is a minimum 0.040"
- Interior Urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are ½" to 6"
- Available in 90, 60, 45, and 30 degree bends

## Applications:

Calbond PVC Coated Aluminum 90° Elbows are available in standard & special radius dimensions and in various degrees as required. All elbows are manufactured from Calbond PVC coated conduit and meet all applicable standards.

## Standards:

- UL/CUL listed in accordance to UL6A & ANSI C80.5 Standards
- UL/cUL listed rigid ferrous metal conduit with polyvinyl chloride coating verified for PVC adhesion performance
- Complies with NEMA RN-1
- UL File Number E230584

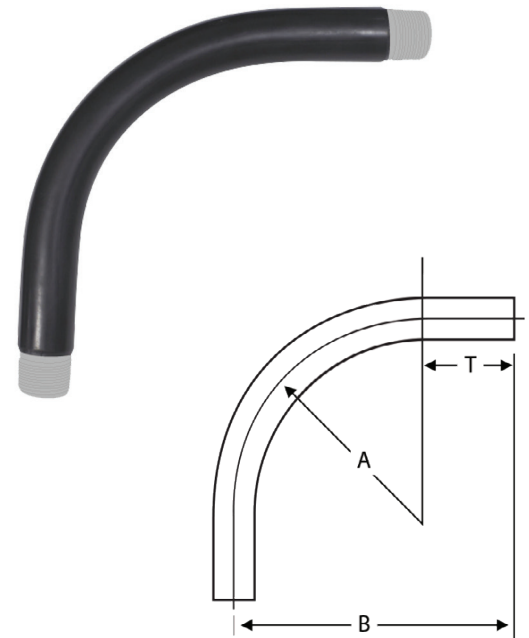

Part Number	Trade Size (in)	Metric Size (mm)	A Standard Radius (in)	B Offset (in)	T Tangent (in)	Weight per 100 (lbs)
PA0590EL00	½	16	4.25	6.0	1.7	31
PA0790EL00	¾	21	4.50	6.7	2.2	42
PA1090EL00	1	27	5.75	8.0	2.4	76
PA1290EL00	1¼	35	7.25	9.6	2.8	118
PA1590EL00	1½	41	8.25	10.6	2.6	157
PA2090EL00	2	53	9.50	12.0	3.5	238
PA2590EL00	2½	63	10.50	14.8	4.7	449
PA3090EL00	3	78	13.00	17.0	5.3	707
PA3590EL00	3½	91	15.00	20.9	6.1	970
PA4090EL00	4	103	16.00	21.0	6.5	1114
PA5090EL00	5	129	24.00	32.0	11.2	2223
PA6090EL00	6	155	30.00	41.0	12.1	3261

All dimensions are for informational purposes only \*Tolerances +/- 5%



For more info visit [calbond.com](http://calbond.com)