


PVC COATED ALUMINUM CONDUIT BODIES - LB FORM 7

Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are ½" to 4"
- Fittings are supplied with plastic encapsulated stainless steel screws
- Sealing sleeves extender 1 pipe diameter or 2 inches, whichever is greater, beyond all female openings

Applications:

Calbond offers the full line of Form 7 PVC Coated Aluminum Conduit Bodies. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.

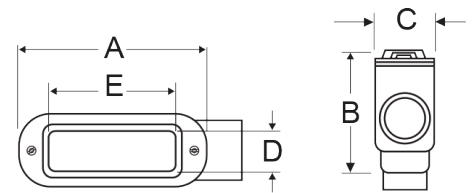

Standards:

- UL Standard 514B
- CSA Standard: C22.2 No. 18

Part Number	Trade Size (in)	Metric Size (mm)	A (in)	B (in)	C (in)	D (in)	E (in)
PA0500LB17SA	½	16	5.10	2.29	1.42	0.94	3.19
PA0700LB27SA	¾	21	5.98	2.54	1.60	1.13	3.81
PA1000LB37SA	1	27	7.01	2.92	1.79	1.38	4.50
PA1200LB47SA	1¼	35	7.79	3.35	2.23	1.75	5.00
PA1500LB57SA	1½	41	8.67	3.73	2.48	1.94	5.44
PA2000LB67SA	2	53	10.17	4.29	3.04	2.44	6.38
PA2500LB77SA	2½	63	12.54	5.17	4.29	3.56	8.38
PA3000LB87SA	3	78	12.54	5.92	4.29	3.56	8.38
PA3500LB97SA	3½	91	14.73	6.60	5.29	4.50	10.25
PA4000LB107SA	4	103	14.73	7.10	5.29	4.50	10.25

All dimensions are for informational purposes only *Tolerances +/- 5%



For more info visit Calbond.com

