

# PVC COATED ALUMINUM CONDUIT BODIES - TB FORM 7

## Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are ½" to 2"
- Fittings are supplied with plastic encapsulated stainless steel screws


## Applications:

Calbond offers the full line of Form 7 PVC Coated Conduit Bodies. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.



## Standards:

- UL Standard 514B
- CSA Standard: C22.2 No. 18

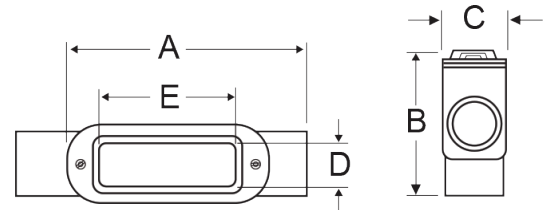

| Part Number  | Trade Size (in) | Metric Size (mm) | A (in) | B (in) | C (in) | D (in) | E (in) |
|--------------|-----------------|------------------|--------|--------|--------|--------|--------|
| PA0500TB17SA | ½               | 16               | 6.63   | 2.67   | 1.64   | 0.94   | 3.19   |
| PA0700TB27SA | ¾               | 21               | 7.75   | 2.92   | 1.83   | 1.13   | 3.81   |
| PA1000TB37SA | 1               | 27               | 9.25   | 3.29   | 2.08   | 1.38   | 4.50   |
| PA1200TB47SA | 1¼              | 35               | 9.94   | 3.35   | 2.27   | 1.75   | 5.00   |
| PA1500TB57SA | 1½              | 41               | 11.19  | 5.04   | 2.52   | 1.94   | 5.44   |
| PA2000TB67SA | 2               | 53               | 13.19  | 6.17   | 3.08   | 2.44   | 6.38   |

All dimensions are for informational purposes only \*Tolerances +/- 5%

