

# PVC COATED CONDUIT BODIES - C MARK 9

## Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are ½" to 4"
- Fittings are supplied with plastic encapsulated stainless steel screws


## Applications:

Allied Tube & Conduit® offers the full line of Mark 9 PVC Coated Aluminum Conduit Bodies. All fittings are supplied with PVC coated aluminum covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.



## Standards:

- UL Standard 514B
- CSA Standard: C22.2 No. 18

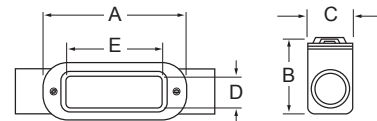

Aluminum Part Number	Trade Size (in)	Metric Size (mm)	A (in)	B (in)	C (in)	D (in)	E (in)
PA0500C19	½	16	6.69	1.48	1.46	1.00	3.31
PA0700C29	¾	21	7.78	1.73	1.27	1.19	3.94
PA1000C39	1	27	9.31	1.98	1.83	1.38	4.56
PA1200C49	1¼	35	11.00	2.42	2.27	1.75	5.31
PA1500C59	1½	41	13.38	2.82	2.83	2.13	6.50
PA2000C69	2	53	14.25	3.60	3.83	3.00	8.56
PA2500C789	2½	63	17.63	4.48	5.08	4.25	10.88
PA3000C889	3	78	17.63	4.85	5.08	4.25	10.88
PA3500C989	3½	91	20.75	5.73	6.33	5.44	13.44
PA4000C1089	4	103	20.75	5.73	6.33	5.44	13.44

All dimensions are for informational purposes only \*Tolerances +/- 5%



For more info visit [alliedeg.us](http://alliedeg.us)