


PVC COATED CONDUIT HUBS - STTTB

Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- STTTB available in 6 trade sizes from 1/2" through 2"
- Sealing sleeves on conduit side of hub
- Molded PVC gasket seals flush with enclosure wall
- Neoprene O-ring gasket provides additional seal
- The length of the sleeve extension(s) shall be at least equivalent to the nominal conduit size for sizes 1/2" - 2"

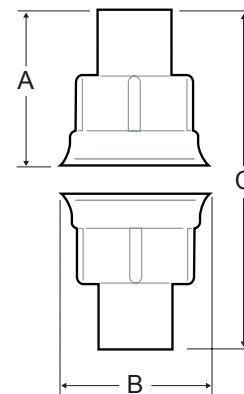

Applications:

Calbond PVC ST Style Hubs are used to terminate conduit runs through the wall of a sheet metal electrical enclosure. They are available with or without grounding lug. STTTB style hubs are "Through-Bulkhead" fittings used to pass conduit runs through firewalls with unlimited wall thickness. (furnished without nipples)

Standards:

- UL 514B
- NEC/CEC:
 - Class I, Division 2,
 - Class II, Division 1 & 2
 - Class III, Division 1 & 2
 - Class I, Zone 1, AEx e II
 - Class I, Zone 1, Ex e II
- All Screw-tight Hubs are manufactured in accordance with NEMA type enclosures 2, 3, 3R, 4, 4x, 11 and 12

Part Number	Trade Size (in)	A (in)	B (in)	C (in)
PV0500STTTB1	½	1.84	2.00	3.68
PV0700STTTB2	¾	2.22	2.25	4.44
PV1000STTTB3	1	2.66	2.50	5.32
PV1200STTTB4	1¼	2.94	3.25	5.88
PV1500STTTB5	1½	3.19	3.50	6.38
PV2000STTTB6	2	3.75	4.25	7.50

All dimensions are for informational purposes only *Tolerances +/- 5%



For more info visit calbond.com