

# PVC COATED CONDUIT BODIES - LB FORM 8

## Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Fittings are supplied with plastic encapsulated stainless steel screws
- Sizes available are ½" to 4"


## Applications:

Calbond offers the full line of Form 8 PVC Coated Conduit Bodies. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.



## Standards:

- UL Listed Standard 514B
- CSA Standard: C22.2 No. 18
- Verified NEMA 4X Rated

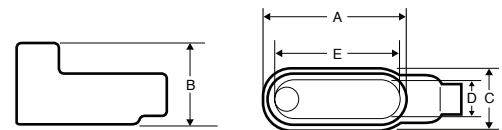

Part Number	Trade Size (in)	Metric Size (mm)	A (in)	B (in)	C (in)	D (in)	E (in)	Weight / 100 (lbs)
PV0500LB18	½	16	5.48	2.26	1.42	1.00	3.31	150
PV0700LB28	¾	21	6.35	2.48	1.60	1.19	3.94	200
PV1000LB38	1	27	7.51	2.85	1.79	1.38	4.56	290
PV1200LB48	1¼	35	8.82	3.38	2.23	1.75	5.31	410
PV1500LB58	1½	41	10.67	4.07	2.79	2.13	6.50	650
PV2000LB68	2	53	13.04	4.85	3.79	3.00	8.56	829
PV2500LB78	2½	63	15.98	6.17	5.04	4.25	10.88	1820
PV3000LB888	3	78	15.98	6.54	5.04	4.25	10.88	2120
PV3500LB98	3½	91	14.73	7.60	6.29	5.44	13.44	3120
PV4000LB108	4	103	14.73	7.85	6.29	5.44	13.44	3200

All dimensions are for informational purposes only \*Tolerances +/- 5%



For more info visit [calbond.com](http://calbond.com)