

PVC COATED CONDUIT BODIES - T MARK 9

Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are 1/2" to 4"
- Fittings are supplied with plastic encapsulated stainless steel screws


Applications:

Calbond offers the full line of Mark 9 PVC Coated Conduit Bodies. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.



Standards:

- UL Standard 514B
- CSA Standard: C22.2 No. 18

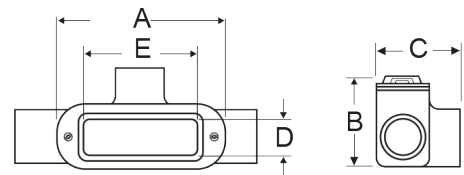

Part Number	Trade Size (in)	Metric Size (mm)	A (in)	B (in)	C (in)	D (in)	E (in)
PA0500T19	½	16	6.69	1.79	2.20	1.00	3.31
PA0700T29	¾	21	2.50	2.04	2.35	1.19	3.94
PA1000T39	1	27	3.30	2.29	2.67	1.38	4.56
PA1200T49	1¼	35	1.90	2.67	3.20	1.75	5.31
PA1500T59	1½	41	7.50	2.82	4.04	2.13	6.50
PA2000T69	2	53	11.70	3.60	5.04	3.00	8.56
PA2500T789	2½	63	19.80	4.48	6.73	4.25	10.88
PA3000T889	3	78	23.10	4.85	6.73	4.25	10.88
PA3500T989	3½	91	21.00	5.73	8.17	5.44	13.44
PA4000T1089	4	103	24.00	5.98	8.17	5.44	13.44

All dimensions are for informational purposes only *Tolerances +/- 5%



For more info visit calbond.com

