

PVC COATED CONDUIT BODIES - X MARK 9

Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are ½" to 2"
- Fittings are supplied with plastic encapsulated stainless steel screws


Applications:

Calbond offers the full line of Mark 9 PVC Coated Conduit Bodies. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.



Standards:

- UL Standard 514B
- CSA Standard: C22.2 No. 18
- NEMA 4X Rated

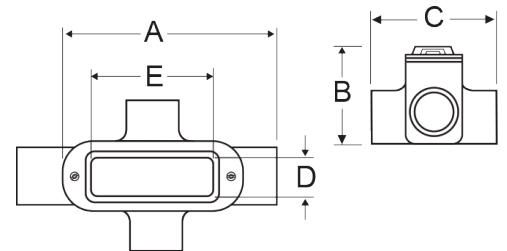

Part Number	Trade Size (in)	Metric Size (mm)	A (in)	B (in)	C (in)	D (in)	E (in)
PA0500X19	½	16	6.69	3.91	1.79	1.00	3.31
PA0700X29	¾	21	7.89	4.56	2.04	1.19	3.94
PA1000X39	1	27	9.31	5.50	2.29	1.38	4.56
PA1200X49	1¼	35	11.00	6.63	2.67	1.75	5.31
PA1500X59	1½	41	13.38	8.25	2.51	2.13	6.50
PA2000X69	2	53	16.25	10.25	3.60	3.00	8.56

All dimensions are for informational purposes only *Tolerances +/- 5%

