

# PVC COATED CONDUIT BODIES - X FORM 7

## Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are 1/2" to 2"
- Fittings are supplied with plastic encapsulated stainless steel screws




## Applications:

Calbond offers the full line of Form 7 PVC Coated Conduit Bodies. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.

## Standards:

- UL Standard 514B
- CSA Standard: C22.2 No. 18

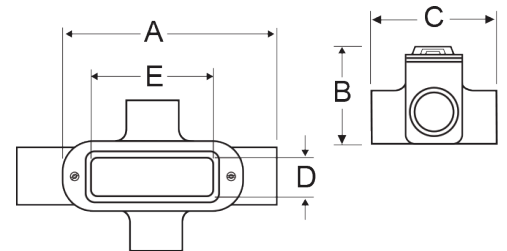

Part Number	Trade Size (in)	Metric Size (mm)	A (in)	B (in)	C (in)	D (in)	E (in)	Weight / 100 (lbs)
PA0500X1700RM	1/2	16	6.63	3.35	1.79	0.94	3.19	170
PA0700X1700RM	3/4	21	7.75	3.54	2.04	1.13	3.81	240
PA1000X1700RM	1	27	9.25	4.04	2.29	1.38	4.50	270
PA1200X1700RM	1 1/4	35	9.94	4.17	2.35	1.75	5.00	360
PA1500X1700RM	1 1/2	41	11.19	4.67	2.60	1.94	5.44	500
PA2000X1700RM	2	53	13.90	5.23	3.17	2.44	6.38	750

All dimensions are for informational purposes only \*Tolerances +/- 5%



For more info visit [calbond.com](http://calbond.com)

