

PVC COATED ALUMINUM CONDUIT BODIES - T FORM 7

Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are ½" to 4"
- Fittings are supplied with plastic encapsulated stainless steel screws


Applications:

Calbond offers the full line of Form 7 PVC Coated Aluminum Conduit Bodies. Conduit Bodies are installed in conduit systems to; act as pull outlets for conductors being installed, provide openings for making splices in conductors, and to provide access to conductors for maintenance and future system changes. All fittings are supplied with PVC coated cast aluminum covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.



Standards:

- UL Standard 514B
- CSA Standard: C22.2 No. 18

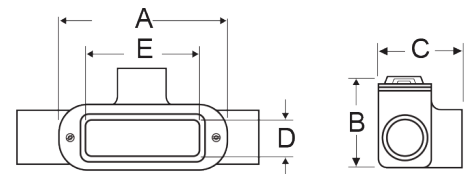

Part Number	Trade Size (in)	Metric Size (mm)	A (in)	B (in)	C (in)	D (in)	E (in)
PA0500T17SA	½	16	6.63	1.79	2.48	0.94	3.19
PA0700T27SA	¾	21	7.75	2.04	2.67	1.13	3.81
PA1000T37SA	1	27	9.25	2.29	3.04	1.38	4.50
PA1200T47SA	1¼	35	9.94	2.35	3.23	1.75	5.00
PA1500T57SA	1½	41	11.19	2.60	3.60	1.94	5.44
PA2000T67SA	2	53	13.19	3.17	4.17	2.44	6.38
PA2500T77SA	2½	63	16.00	3.67	5.79	3.56	8.38
PA3000T87SA	3	78	16.06	4.42	5.79	3.56	8.38
PA3500T97SA	3½	91	18.31	4.92	6.98	4.50	10.25
PA4000T107SA	4	103	18.31	5.42	6.98	4.50	10.25

All dimensions are for informational purposes only *Tolerances +/- 5%

