

# PVC COATED CONDUIT BODIES - C FORM 7

## Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are ½" to 3"
- Fittings are supplied with plastic encapsulated stainless steel screws


## Applications:

Calbond offers the full line of C Form 7 PVC Coated Conduit Bodies. Conduit Bodies are installed in conduit systems to; act as pull outlets for conductors being installed, provide openings for making splices in conductors, and to provide access to conductors for maintenance and future system changes. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.



## Standards:

- UL Standard 514B
- CSA Standard: C22.2 No. 18

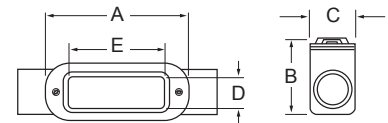

Part Number	Trade Size (in)	Metric Size (mm)	A (in)	B (in)	C (in)	D (in)	E (in)	Weight / 100 (lbs)
PV0500C17	½	16	6.38	1.42	1.46	0.94	3.19	100
PV0700C27	¾	21	7.50	1.67	1.64	1.13	3.81	140
PV1000C37	1	27	9.00	1.92	1.83	1.38	4.50	220
PV1200C47	1¼	35	9.94	2.35	2.27	1.75	5.00	270
PV1500C57	1½	41	11.19	2.60	2.52	1.94	5.44	400
PV2000C67	2	53	11.19	3.17	3.08	2.44	6.38	550
PV2500C77	2½	63	14.00	3.67	4.33	3.56	8.38	1000
PV3000C87	3	78	13.75	4.42	4.33	3.56	8.38	1180

All dimensions are for informational purposes only \*Tolerances +/- 5%

