

PVC COATED CONDUIT BODIES - LL FORM 8

Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are ½" to 4"
- Fittings are supplied with plastic encapsulated stainless steel screws


Applications:

Calbond offers the full line of LL Form 8 PVC Coated Conduit Bodies. Conduit Bodies are installed in conduit systems to; act as pull outlets for conductors being installed, provide openings for making splices in conductors, and to provide access to conductors for maintenance and future system changes. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.



Standards:

- UL Standard 514B
- CSA Standard: C22.2 No. 18

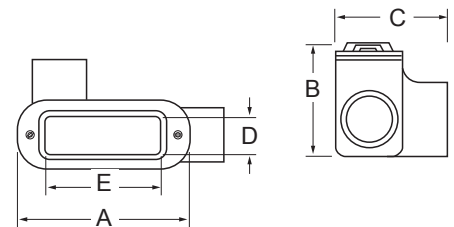

Part Number	Trade Size (in)	Metric Size (mm)	A (in)	B (in)	C (in)	D (in)	E (in)	Weight / 100 (lbs)
PV0500LL18	½	16	5.48	1.48	2.20	1.00	3.31	140
PV0700LL28	¾	21	6.35	1.73	2.35	1.19	3.94	210
PV1000LL38	1	27	7.51	1.98	2.67	1.38	4.56	260
PV1200LL48	1¼	35	8.82	2.42	3.20	1.75	5.31	420
PV1500LL58	1½	41	10.67	2.82	4.04	2.13	6.50	620
PV2000LL68	2	53	13.04	3.60	5.04	3.00	8.56	1050
PV2500LL78	2½	63	15.98	4.48	6.73	4.25	10.88	1900
PV3000LL88	3	78	15.98	4.85	6.73	4.25	10.88	2150
PA3500LL989	3½	91	14.73	4.92	6.98	4.50	10.25	2150
PA4000LL1089	4	103	14.73	5.42	6.98	4.50	10.25	2450

All dimensions are for informational purposes only *Tolerances +/- 5%

