

# PVC COATED CONDUIT BODIES - T FORM 7

## Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are ½" to 4"
- Fittings are supplied with plastic encapsulated stainless steel screws




## Applications:

Calbond offers the full line of T Form 7 PVC Coated Conduit Bodies. Conduit Bodies are installed in conduit systems to; act as pull outlets for conductors being installed, provide openings for making splices in conductors, and to provide access to conductors for maintenance and future system changes. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.

## Standards:

- UL Standard 514B
- CSA Standard: C22.2 No. 18

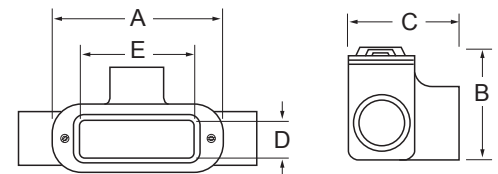

Part Number	Trade Size (in)	Metric Size (mm)	A (in)	B (in)	C (in)	D (in)	E (in)	Weight / 100 (Lbs)
PV0500T17	½	16	6.63	1.79	2.48	0.94	3.19	150
PV0700T27	¾	21	7.75	2.04	2.67	1.13	3.81	210
PV1000T37	1	27	9.25	2.29	3.04	1.38	4.50	290
PV1200T47	1¼	35	9.94	2.35	3.23	1.75	5.00	360
PV1500T57	1½	41	11.19	2.60	3.60	1.94	5.44	450
PV2000T67	2	53	13.19	3.17	4.17	2.44	6.38	650
PV2500T777	2½	63	16.00	3.67	5.79	3.56	8.38	1070
PV3000T87	3	78	16.06	4.42	5.79	3.56	8.38	1540
PV3500T97	3½	91	18.31	4.92	6.98	4.50	10.25	1900
PV4000T107	4	103	18.31	5.42	6.98	4.50	10.25	2100

All dimensions are for informational purposes only \*Tolerances +/- 5%

